



MXC605-LS LOUDSPEAKER

OVERVIEW

The MXC605-LS is a loudspeaker accessory for use with the Microflex® Complete (MXC) digital conference system. This unit provides sound reinforcement of local talkers and external audio sources when the connected -FS or -FL conference unit's microphone is activated.

FEATURES

- Compatible with MXC605-FS and MXC605-FL
- Connects to MXC605-FS or MXC605-FL via the attached cable mounted with a Molex 2-pin SPI

SPECIFICATIONS (subject to change)

ELECTRICAL

Frequency range (loudspeaker)	150 Hz-15 kHz
Power consumption	1,5 W
Interconnection	Cable mounted with Molex 2-pin SPOX connector
MECHANICAL	
Installation	Fixed tabletop mounting (48 mm diameter hole)
Dimension (H x W x D)	44 x 108 x 78 mm (1.73 x 4.25 x 3.07 in.)
Weight	500 g (1.1 lbs.)
Color	Black
Operating temperature range	5° to 40° C

Data subject to change without notice in interest of product improvements.



MXC605-LS
Loudspeaker

AVAILABLE MODEL




MXC605-LS	Loudspeaker for use with MXC605-FL or MXC605-FS
-----------	---

INCLUDED ACCESSORY

None

AVAILABLE ACCESSORIES

None

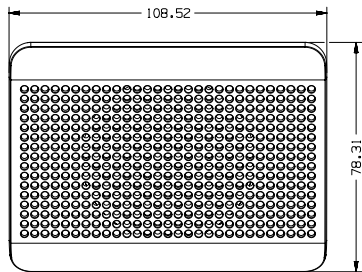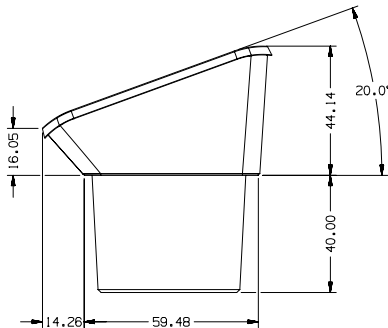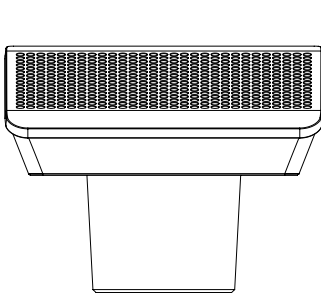

Dimensions shown in mm